



SIGN	DESCRIPTION	DATE	APPROVER
---			

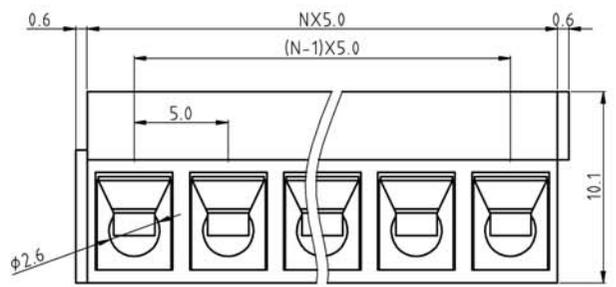

Technical Data:  
Material:  
Terminal: Copper Alloy Tin plated  
screw: Steel galvanized with Cr3+ plated  
Wire guard: Stainless steel  
Insulator body(housing): Polyamide(UL94V-0)


Electrical  
Voltage rating: 250VAC  
Current rating: 15 Amps/way max  
Contact resistance: 20mΩ(max)  
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
Wire range: 14-24AWG

Mechanical:  
Torque: 4.0kgf.cm/M2.5  
Operating temperature: -40°C to +105°C  
Soldering reliability:  
Test temperature= 250°C±10°C  
5 seconds max


Ordering Information:  
F11 - 4 - 5 XX - X 0 0 X 0

2	02	5	Green
-	-	6	Blue
24	24	8	Grey
		A	Black
		1	"-" SCREW
		2	"-/+ " SCREW

N=Number of contacts

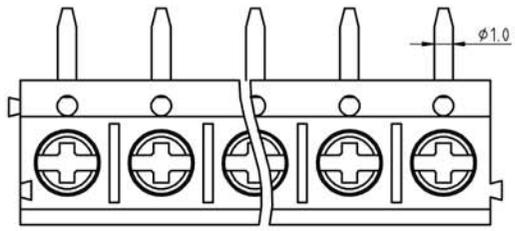

P.C.B. LAYOUT

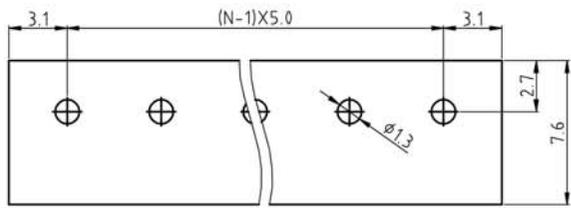

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X: ±0.50	CHECKED:	F11 - 4 - pitch 5.0mm
X.X ±0.30	DRAWN: Yang Ming 2012,06,20	- series
X.XX ±0.20	UNITS: mm	PART NO: F1145XX200X0
X° ±1°	SCALE: 4 / 1	REV: A
	PAGE: 1 / 1	DWG NO: 9F1145001B