


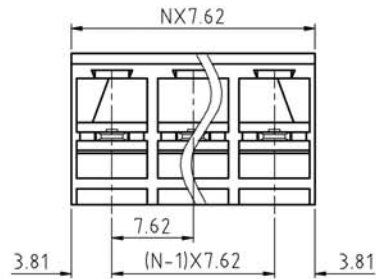


SIGN	DESCRIPTION	DATE	APPROVER

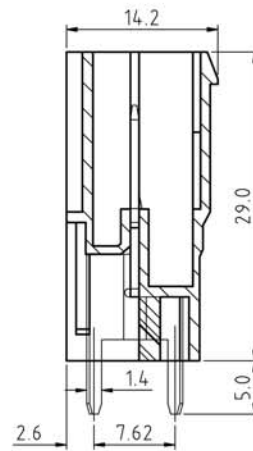

P.C.B. LAYOUT

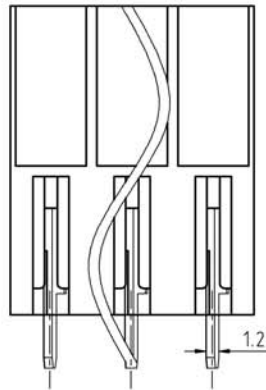

N=Number of contacts

Technical Data:

Material:

Terminal: Copper Alloy Tin plated

Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 32 Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Soldering reliability:

Test temperature= $250^{\circ}\text{C} \pm 10^{\circ}\text{C}$

5 seconds max

Ordering Information:

F87-5-G XX-0 0 0 X 0

2	02	5	Green
-	-	6	Blue
24	24	8	Grey
		A	Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME: F87 - 5 - Pitch 7.62mm
X: ± 0.50	CHECKED:	- Series
X.X: ± 0.30	DRAWN: Yang Ming 2012,06,20	
X.XX: ± 0.20	UNITS: mm	PART NO: F875GXX000X0
X°: $\pm 1^{\circ}$	REV: A	DWG NO: 9F875G001A
	SCALE: 2 / 1	PAGE: 1 / 1