SIGN	DESCRIPTON	DATE	APPROVER

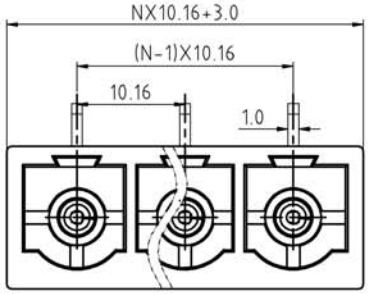

N=Number of contacts

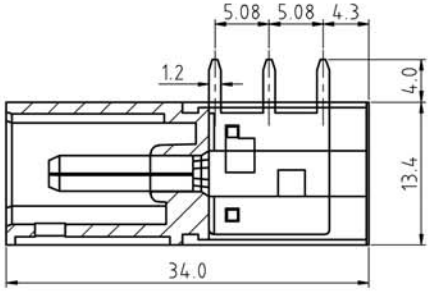

P.C.B. LAYOUT

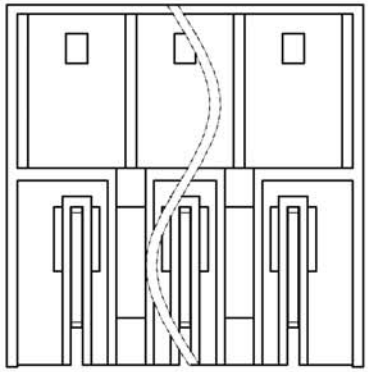

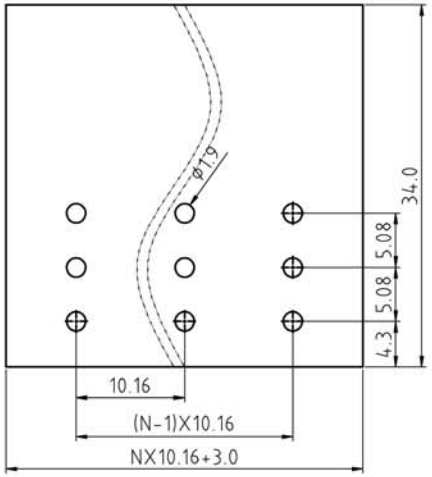

Technical Data:
Material:
Terminal: Copper Alloy Tin plated
Insulator body(housing): Polyamide(Glass filled)(UL94V-0)
Electrical
Voltage rating: 300VAC
Current rating: 60Amps/way max
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
Mechanical:
Operating temperature: -40°C to +105°C
Soldring reliability:
Test temperature= 250°C±10°C
5 seconds max
Ordering Information:

F88-9-K XX-0 0 0 X 0

XX: 2 ~ 24, 02 ~ 24

X:
5 Green
6 Blue
8 Grey
A Black

WELINK 上海拓尔普电子科技有限公司 Welink International Co.,LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:		NAME: F88 -9 - Pitch 10.16mm - Series UP
	CHECKED:		
	DRAWN: Yang Ming 2012,06,20		
	UNITS: mm	REV: A	PART NO: F889KXX000X0
	SCALE: 2 / 1	PAGE: 1 / 1	DWG NO: 9F889K001A